



ISSN:2229-6107



**INTERNATIONAL JOURNAL OF
PURE AND APPLIED SCIENCE & TECHNOLOGY**

E-mail :
editor.ijpast@gmail.com
editor@ijpast.in

www.ijpast.in

DRIVER DROWSINESS MONITORING SYSTEM USING MACHINE LEARNING

RAVI KIRAN KUMAR TERA 1, CHINNINGU BHAVANI 2, CHILIPICHUD KALPANA 3, ANTHAM TEJASREE 4, VASARA VINEETH REDDY 5,

ABSTRACT—Drowsy driving is one of the major causes of road accidents and death. Hence, detection of driver's fatigue and its indication is an active research area. Most of the conventional methods are either vehicle based, or behavioural based or physiological based. Few methods are intrusive and distract the driver, some require expensive sensors and data handling. Therefore, in this study, a low cost, real time driver's drowsiness detection system is developed with acceptable accuracy. In the developed system, a webcam records the video and driver's face is detected in each frame employing image processing techniques. Facial landmarks on the detected face are pointed and subsequently the eye aspect ratio, mouth opening ratio and nose length ratio are computed and depending on their values, drowsiness is detected based on developed adaptive thresholding. Machine learning algorithms have been implemented as well in an offline manner. A sensitivity of 95.58% and specificity of 100% has been achieved in Support Vector Machine based classification.

Keywords: Drowsiness detection, visual behaviour, eye aspect ratio, mouth opening ratio, nose length ratio.

I. INTRODUCTION

Drowsy driving is one of the major causes of deaths occurring in road accidents. The truck drivers who drive for continuous long hours (especially at night), bus drivers of long distance route or overnight buses are more susceptible to this problem. Driver drowsiness is an overcast nightmare to passengers in every country. Every year, a large number of injuries and deaths occur due to fatigue related road accidents. Hence, detection of driver's fatigue and its indication is an active area of research due to its immense practical applicability. The basic drowsiness detection system has three blocks/modules; acquisition system, processing system and warning system. Here, the video of the driver's frontal face is

captured in acquisition system and transferred to the processing block where it is processed online to detect drowsiness. If drowsiness is detected, a warning or alarm is sent to the driver from the warning system. Generally, the methods to detect drowsy drivers are classified in three types; vehicle based, behavioural based and physiological based. In vehicle based method, a number of metrics like steering wheel movement, accelerator or brake pattern, vehicle speed, lateral acceleration, deviations from lane position etc. are monitored continuously. Detection of any abnormal change in these values is considered as driver drowsiness.

This is a nonintrusive measurement as the sensors are not attached on the driver. In behavioural based method [17], the visual behavior of the driver i.e., eye blinking, eye closing, yawn, head bending etc. are analyzed to detect drowsiness. This is also nonintrusive measurement as simple camera is used to detect these features. In physiological based method [8,9], the physiological signals like Electrocardiogram (ECG), Electrooculogram (EOG), Electroencephalogram (EEG), heartbeat, pulse rate etc. are monitored and from these metrics, drowsiness or fatigue level is detected. This is intrusive measurement as the sensors are attached on the driver which will distract the driver. Depending on the sensors used in the system, system cost as well as size will increase. However, inclusion of more parameters/features will increase the accuracy of the system to a certain extent. These factors motivate us to develop a low-cost, real time driver's drowsiness detection system with acceptable accuracy. Hence, we have proposed a webcam based system to detect driver's fatigue from the face image only using image processing and machine learning techniques to make the system low-cost as well as portable.

THE PROPOSED SYSTEM AND COMPUTATION OF PARAMETERS

A block diagram of the proposed driver drowsiness monitoring system has been depicted in Fig 1. At first, the video is recorded using a webcam. The camera will be positioned in front of the driver to capture the front face image. From the video, the frames are extracted to obtain 2-D images. Face is detected in the frames using histogram of oriented gradients (HOG) and linear support vector machine (SVM) for object detection [10]. After detecting the face, facial landmarks [11] like positions of eye, nose, and mouth are marked on the images. From the facial landmarks, eye

aspect ratio, mouth opening ratio and position of the head are quantified and using these features and machine learning approach, a decision is obtained about the drowsiness of the driver. If drowsiness is detected, an alarm will be sent to the driver to alert him/her. The details of each block are discussed below.

EXISTING SYSTEM :-

- Generally, the methods to detect drowsy drivers are classified in three types;
 - Vehicle based,
 - Behavioural based
 - Physiological based
- In vehicle based method, a number of metrics like steering wheel movement, accelerator or brake pattern, vehicle speed, lateral acceleration, deviations from lane position etc. are monitored continuously. Detection of any abnormal change in these values is considered as driver drowsiness. This is a nonintrusive measurement as the sensors are not attached on the driver
- In behavioural based method [1- 7], the visual behavior of the driver i.e., eye blinking, eye closing, yawn, head bending etc. are analyzed to detect drowsiness. This is also nonintrusive measurement as simple camera is used to detect these features.
- In physiological based method [8,9], the physiological signals like Electrocardiogram (ECG), Electrooculogram (EOG), Electroencephalogram (EEG), heartbeat, pulse rate etc. are monitored and from these metrics, drowsiness or fatigue level is detected. This is intrusive measurement as the sensors are

attached on the driver which will distract the driver

DIS-ADVANTAGES :-

- Depending on the sensors used in the system, system cost as well as size will increase. However, inclusion of more parameters/features will increase the accuracy of the system to a certain extent

PROPOSED SYSTEM: -

we have proposed a webcam based system to detect driver's fatigue from the face image only using image processing and machine learning techniques to make the system low-cost as well as portable. A block diagram of the proposed driver drowsiness monitoring system has been depicted in Fig 1. At first, the video is recorded using a webcam. The camera will be positioned in front of the driver to capture the front face image. From the video, the frames are extracted to obtain 2-D images. Face is detected in the frames using histogram of oriented gradients (HOG) and linear support vector machine (SVM) for object detection [10]. After detecting the face, facial landmarks [11] like positions of eye, nose, and mouth are marked on the images. From the facial landmarks, eye aspect ratio, mouth opening ratio and position of the head are quantified and using these features and machine learning approach, a decision is obtained about the drowsiness of the driver. If drowsiness is detected, an alarm will be sent to the driver to alert him/her. The details of each block are discussed below

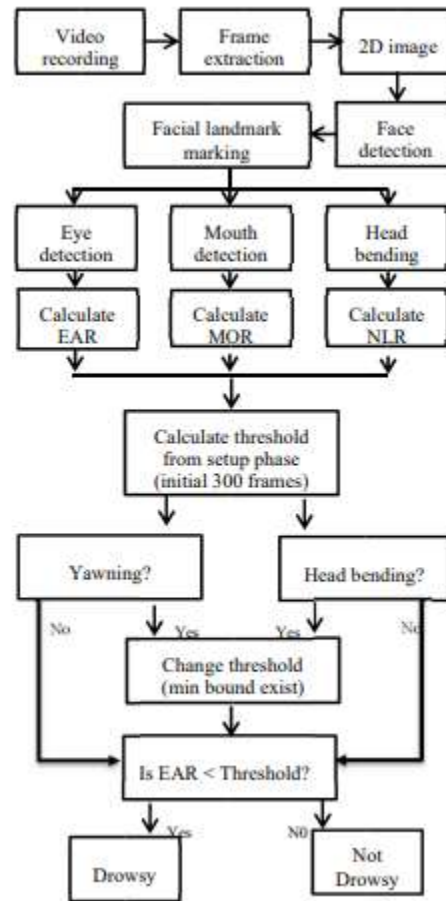


Fig1 : The block diagram of the proposed drowsiness detection system

A. Data Acquisition The video is recorded using webcam (Sony CMUBR300) and the frames are extracted and processed in a laptop. After extracting the frames, image processing techniques are applied on these 2D images. Presently, synthetic driver data has been generated. The volunteers are asked to look at the webcam with intermittent eye blinking, eye closing, yawning and head bending. The video is captured for 30 minutes duration.

B. Face Detection After extracting the frames, first the human faces are detected. Numerous online face detection algorithms are there. In this study, histogram of oriented gradients (HOG) and linear SVM method [10] is used. In this method, positive samples of 118728 fixed window size are

taken from the images and HOG descriptors are computed on them. Subsequently, negative samples (samples that do not contain the required object to be detected i.e., human face here) of same size are taken and HOG descriptors are calculated. Usually the number of negative samples is very greater than number of positive samples. After obtaining the features for both the classes, a linear SVM is trained for the classification task. To improve the accuracy of SVM, hard negative mining is used. In this method, after training, the classifier is tested on the labeled data and the false positive sample feature values are used again for training purpose. For the test image, the fixed size window is translated over the image and the classifier computes the output for each window location. Finally, the maximum value output is considered as the detected face and a bounding box is drawn around the face. This non-maximum suppression step removes the redundant and overlapping bounding boxes.

C. Facial Landmark marking After detecting the face, the next task is to find the locations of different facial features like the corners of the eyes and mouth, the tip of the nose and so on. Prior to that, the face images should be normalized in order to reduce the effect of distance from the camera, non-uniform illumination and varying image resolution. Therefore, the face image is resized to a width of 500 pixels and converted to grayscale image. After image normalization, ensemble of regression trees [11] is used to estimate the landmark positions on face from a sparse subset of pixel intensities. In this method, the sum of square error loss is optimized using gradient boosting learning. Different priors are used to find different structures. Using this method, the boundary points of eyes, mouth and the central line of the nose are marked and the number of points for eye, mouth and nose are given in Table I. The facial

landmarks are shown in Fig 2. The red points are the detected landmarks for further processing.

Table I: Facial landmark points

Parts	Landmark Points
Mouth	[13-24]
Right eye	[1-6]
Left eye	[7-12]
Nose	[25-28]

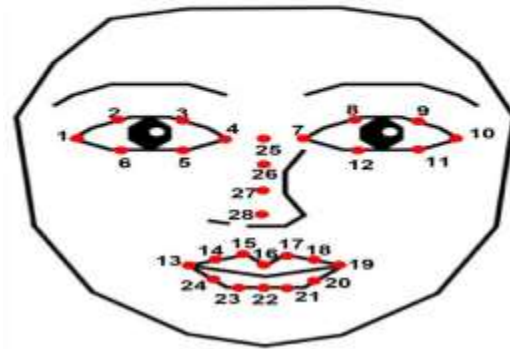


Fig. 2 The facial landmark points

CONCLUSION In this paper, a low cost, real time driver drowsiness monitoring system has been proposed based on visual behavior and machine learning. Here, visual behavior features like eye aspect ratio, mouth opening ratio and nose length ratio are computed from the streaming video, captured by a webcam. An adaptive thresholding technique has been developed to detect driver drowsiness in real time. The developed system works accurately with the generated synthetic data. Subsequently, the feature values are stored and machine learning algorithms have been used for classification. Bayesian classifier, FLDA and SVM have been explored here. It has been observed that FLDA and SVM outperform Bayesian classifier. The sensitivity of FLDA and SVM is 0.896 and 0.956 respectively whereas the specificity is 1 for both. As FLDA and SVM give better accuracy, work will be carried out to implement them in the developed system to do the classification (i.e., drowsiness detection) online. Also, the system will be implemented in hardware to make it portable for car system and pilot study on drivers will

be carried out to validate the developed system.

REFERENCES

- [1] W. L. Ou, M. H. Shih, C. W. Chang, X. H. Yu, C. P. Fan, "Intelligent Video-Based Drowsy Driver Detection System under Various Illuminations and Embedded Software Implementation", 2015 international Conf. on Consumer Electronics - Taiwan, 2015.
- [2] W. B. Horng, C. Y. Chen, Y. Chang, C. H. Fan, "Driver Fatigue Detection based on Eye Tracking and Dynamic Template Matching", IEEE International Conference on Networking, Sensing and Control, Taipei, Taiwan, March 21-23, 2004.
- [3] S. Singh, N. P. papanikolopoulos, "Monitoring Driver Fatigue using Facial Analysis Techniques", IEEE Conference on Intelligent Transportation System, pp 314-318.
- [4] B. Alshaqqaqi, A. S. Baquhaizel, M. E. A. Ouis, M. Boumehed, A. Ouamri, M. Keche, "Driver Drowsiness Detection System", IEEE International Workshop on Systems, Signal Processing and their Applications, 2013.
- [5] M. Karchani, A. Mazlumi, G. N. Saraji, A. Nahvi, K. S. Haghighi, B. M. Abadi, A. R. Foroshani, A. Niknezhad, "The Steps of Proposed Drowsiness Detection System Design based on Image Processing in Simulator Driving", International Research Journal of Applied and Basic Sciences, vol. 9(6), pp 878-887, 2015.
- [6] R. Ahmad, and J. N. Borole, "Drowsy Driver Identification Using Eye Blink Detection," IJISSET - International Journal of Computer Science and Information Technologies, vol. 6, no. 1, pp. 270-274, Jan. 2015.
- [7] A. Abas, J. Mellor, and X. Chen, "Non-intrusive drowsiness detection by employing Support Vector Machine," 2014 20th International Conference on Automation and Computing (ICAC), Bedfordshire, UK, 2014, pp. 188- 193.
- [8] A. Sengupta, A. Dasgupta, A. Chaudhuri, A. George, A. Routray, R. Guha; "A Multimodal System for Assessing Alertness Levels Due to Cognitive Loading", IEEE Trans. on Neural Systems and Rehabilitation Engg., vol. 25 (7), pp 1037-1046, 2017.
- [9] K. T. Chui, K. F. Tsang, H. R. Chi, B. W. K. Ling, and C. K. Wu, "An accurate ECG based transportation safety drowsiness detection scheme